

PRODUCT PARAMETERS

Specifications	180mm×1220mm
Thickness	4mm~6mm
	TITITI OTTITI
Fire-proof level	Level B1
Main components	Rock powder,resin
Wear-resisting layer thickness	0.3mm
Weight per square meter	8kg(4mm)





















Tips: Due to influences of the construction of auxiliary material(adhesive, self leveling cement, interfacial agent), ground environment and climate change etc.during the installation process of floor, the non-standard installation will cause the serious hidden dangers, defects and irreversible rework loss, therefore, we advise you had better consult or hire a professional installerto construct first before installation PVC floor.

Ground treatment: The ground should be hard, dry, clean, no cracks,no grease and mold release agent,and should use the vacuum cleaner to processing the sanding ground. Select different primer according to the type of floor, and the primer shall be evenly coated on the floor for self leveling after drying. Expansion joint: 3-6mm expansion joint must be reserved between floor, wall, column and other fixed buildings. When the floor passes through the room, a 5-8mm expansion joint shall be left at the door between the two rooms, and the joint shall be connected with a batten. When a fixed pipe crosses the floor, the floor opening shall be 10mm larger than the pipe diameter (i.e.5mm clearance shall be maintained on one side). It is recommended to leave an additional expansion joint of 5-10 mm between the floor and the floor when the continuous pavement is more than 6m, and connect it with a batten.

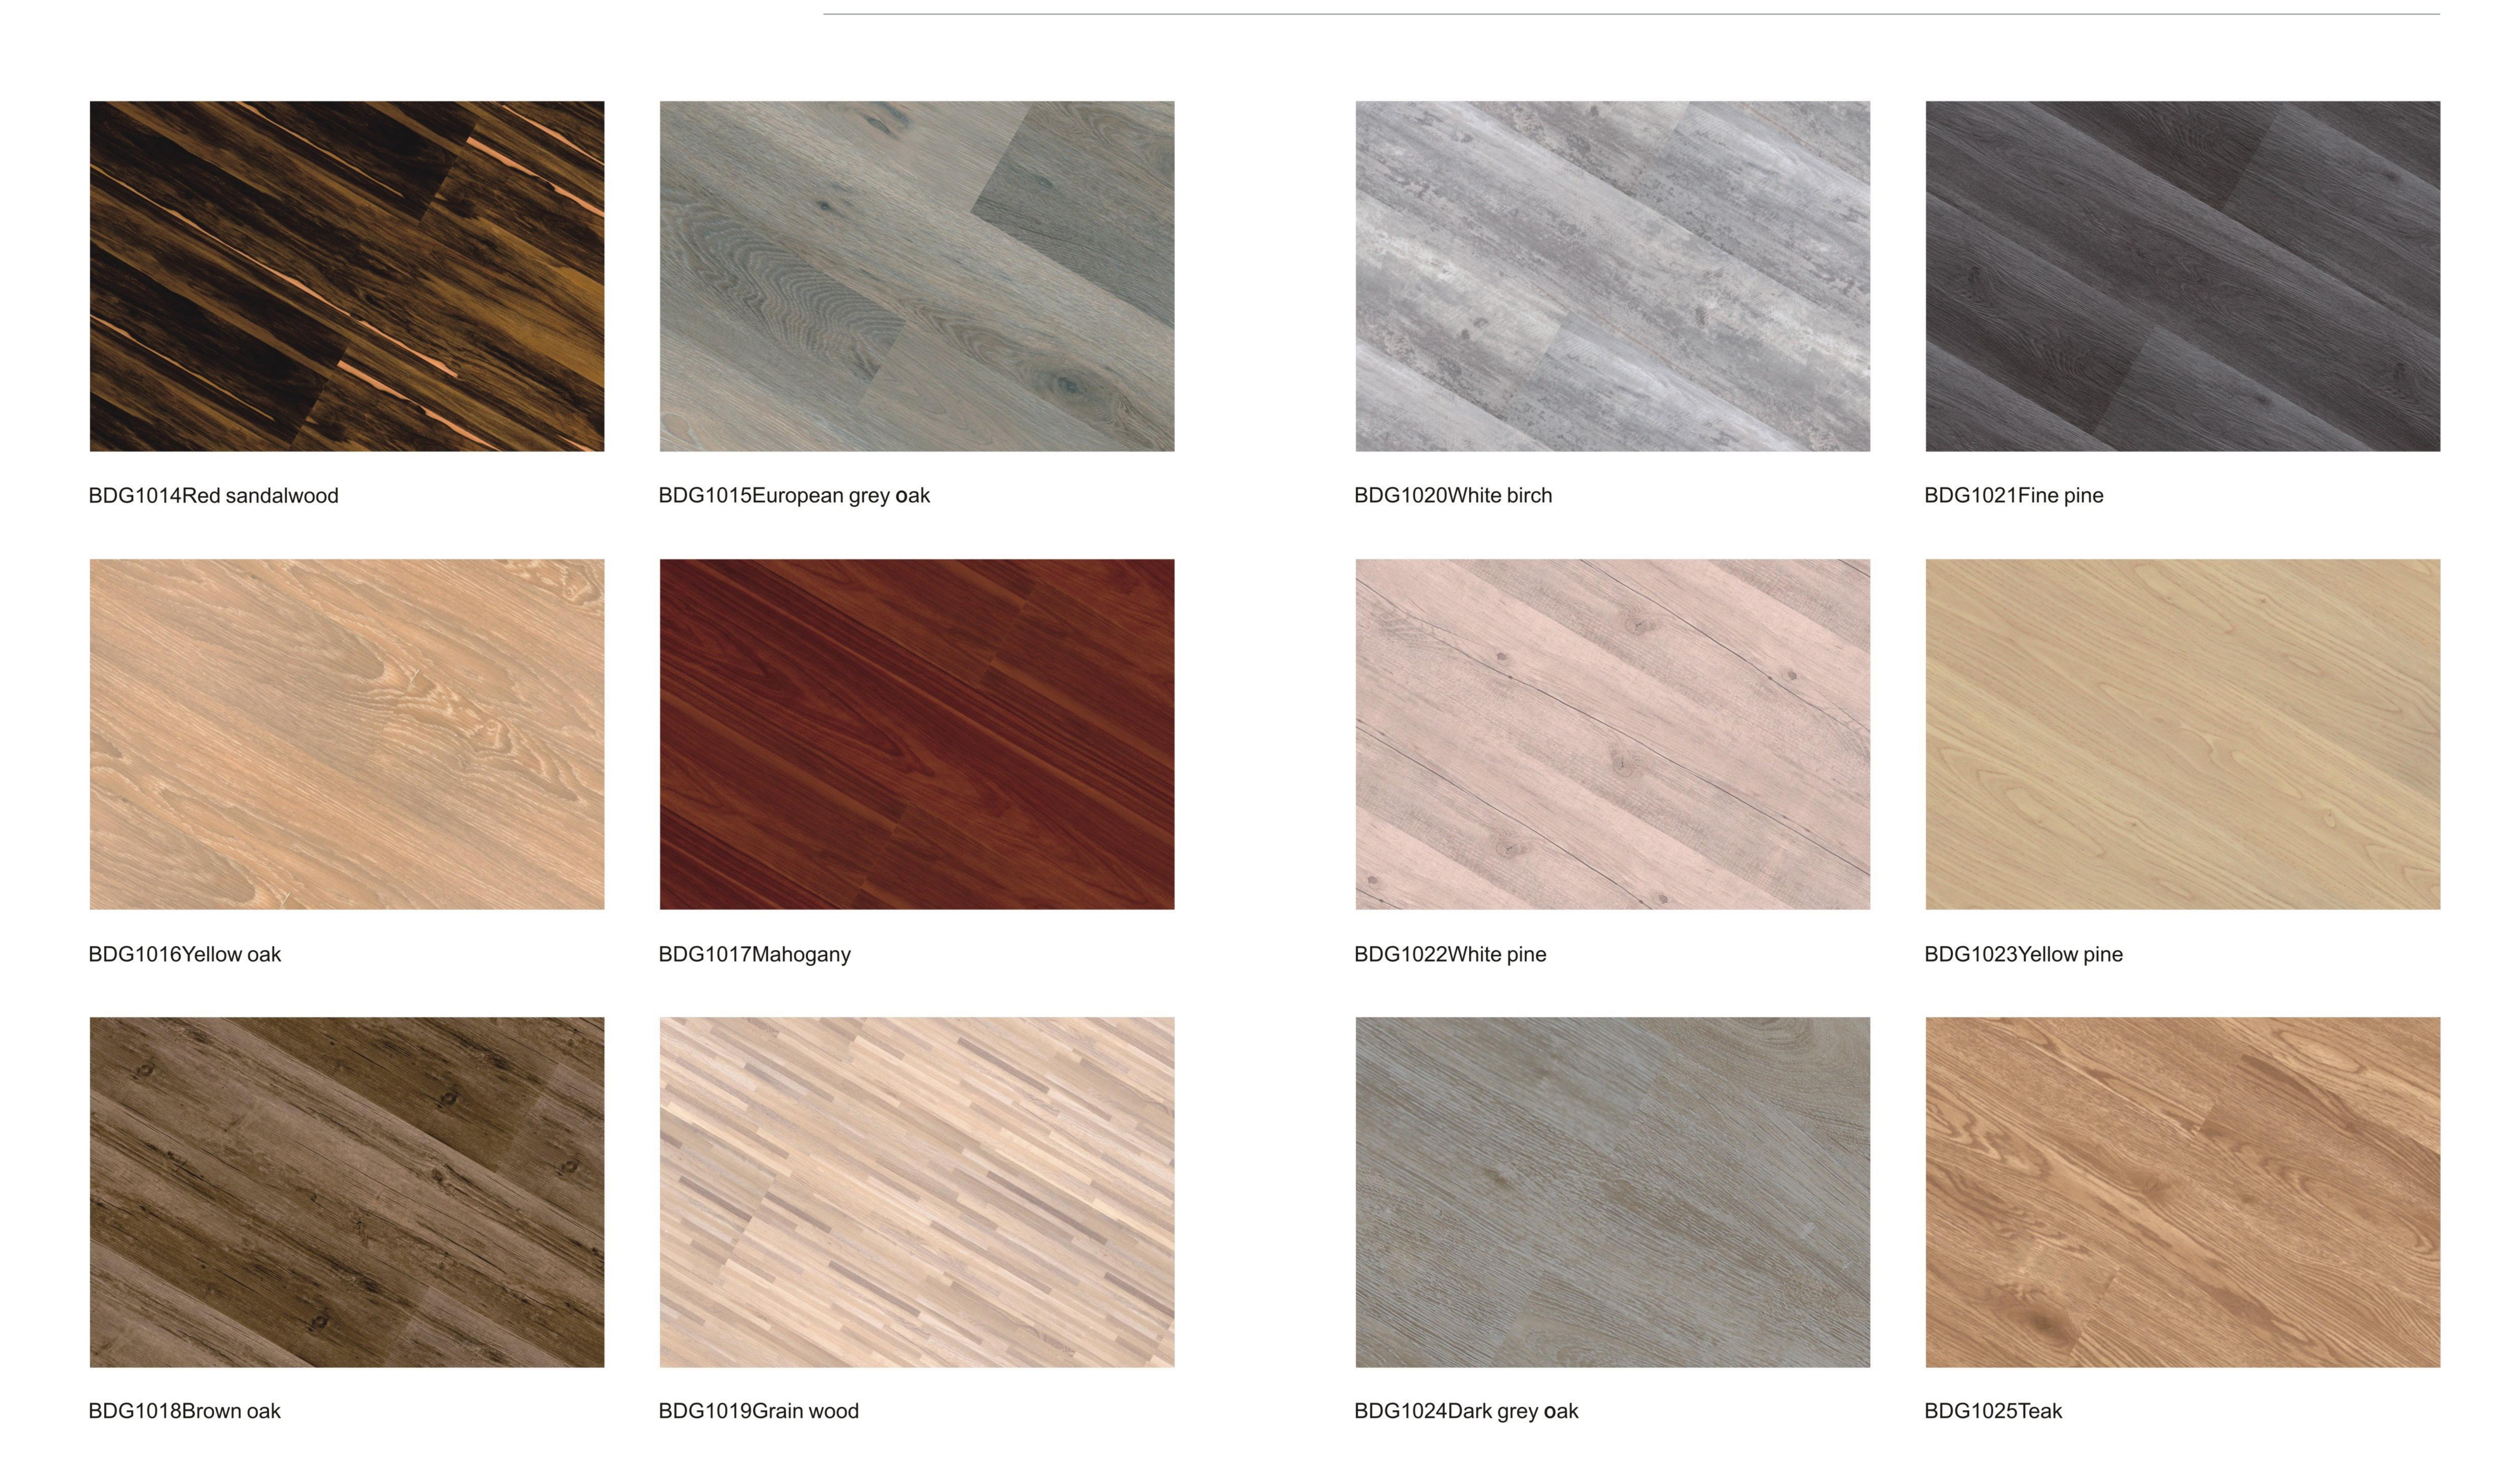


 $\mathbf{0}$

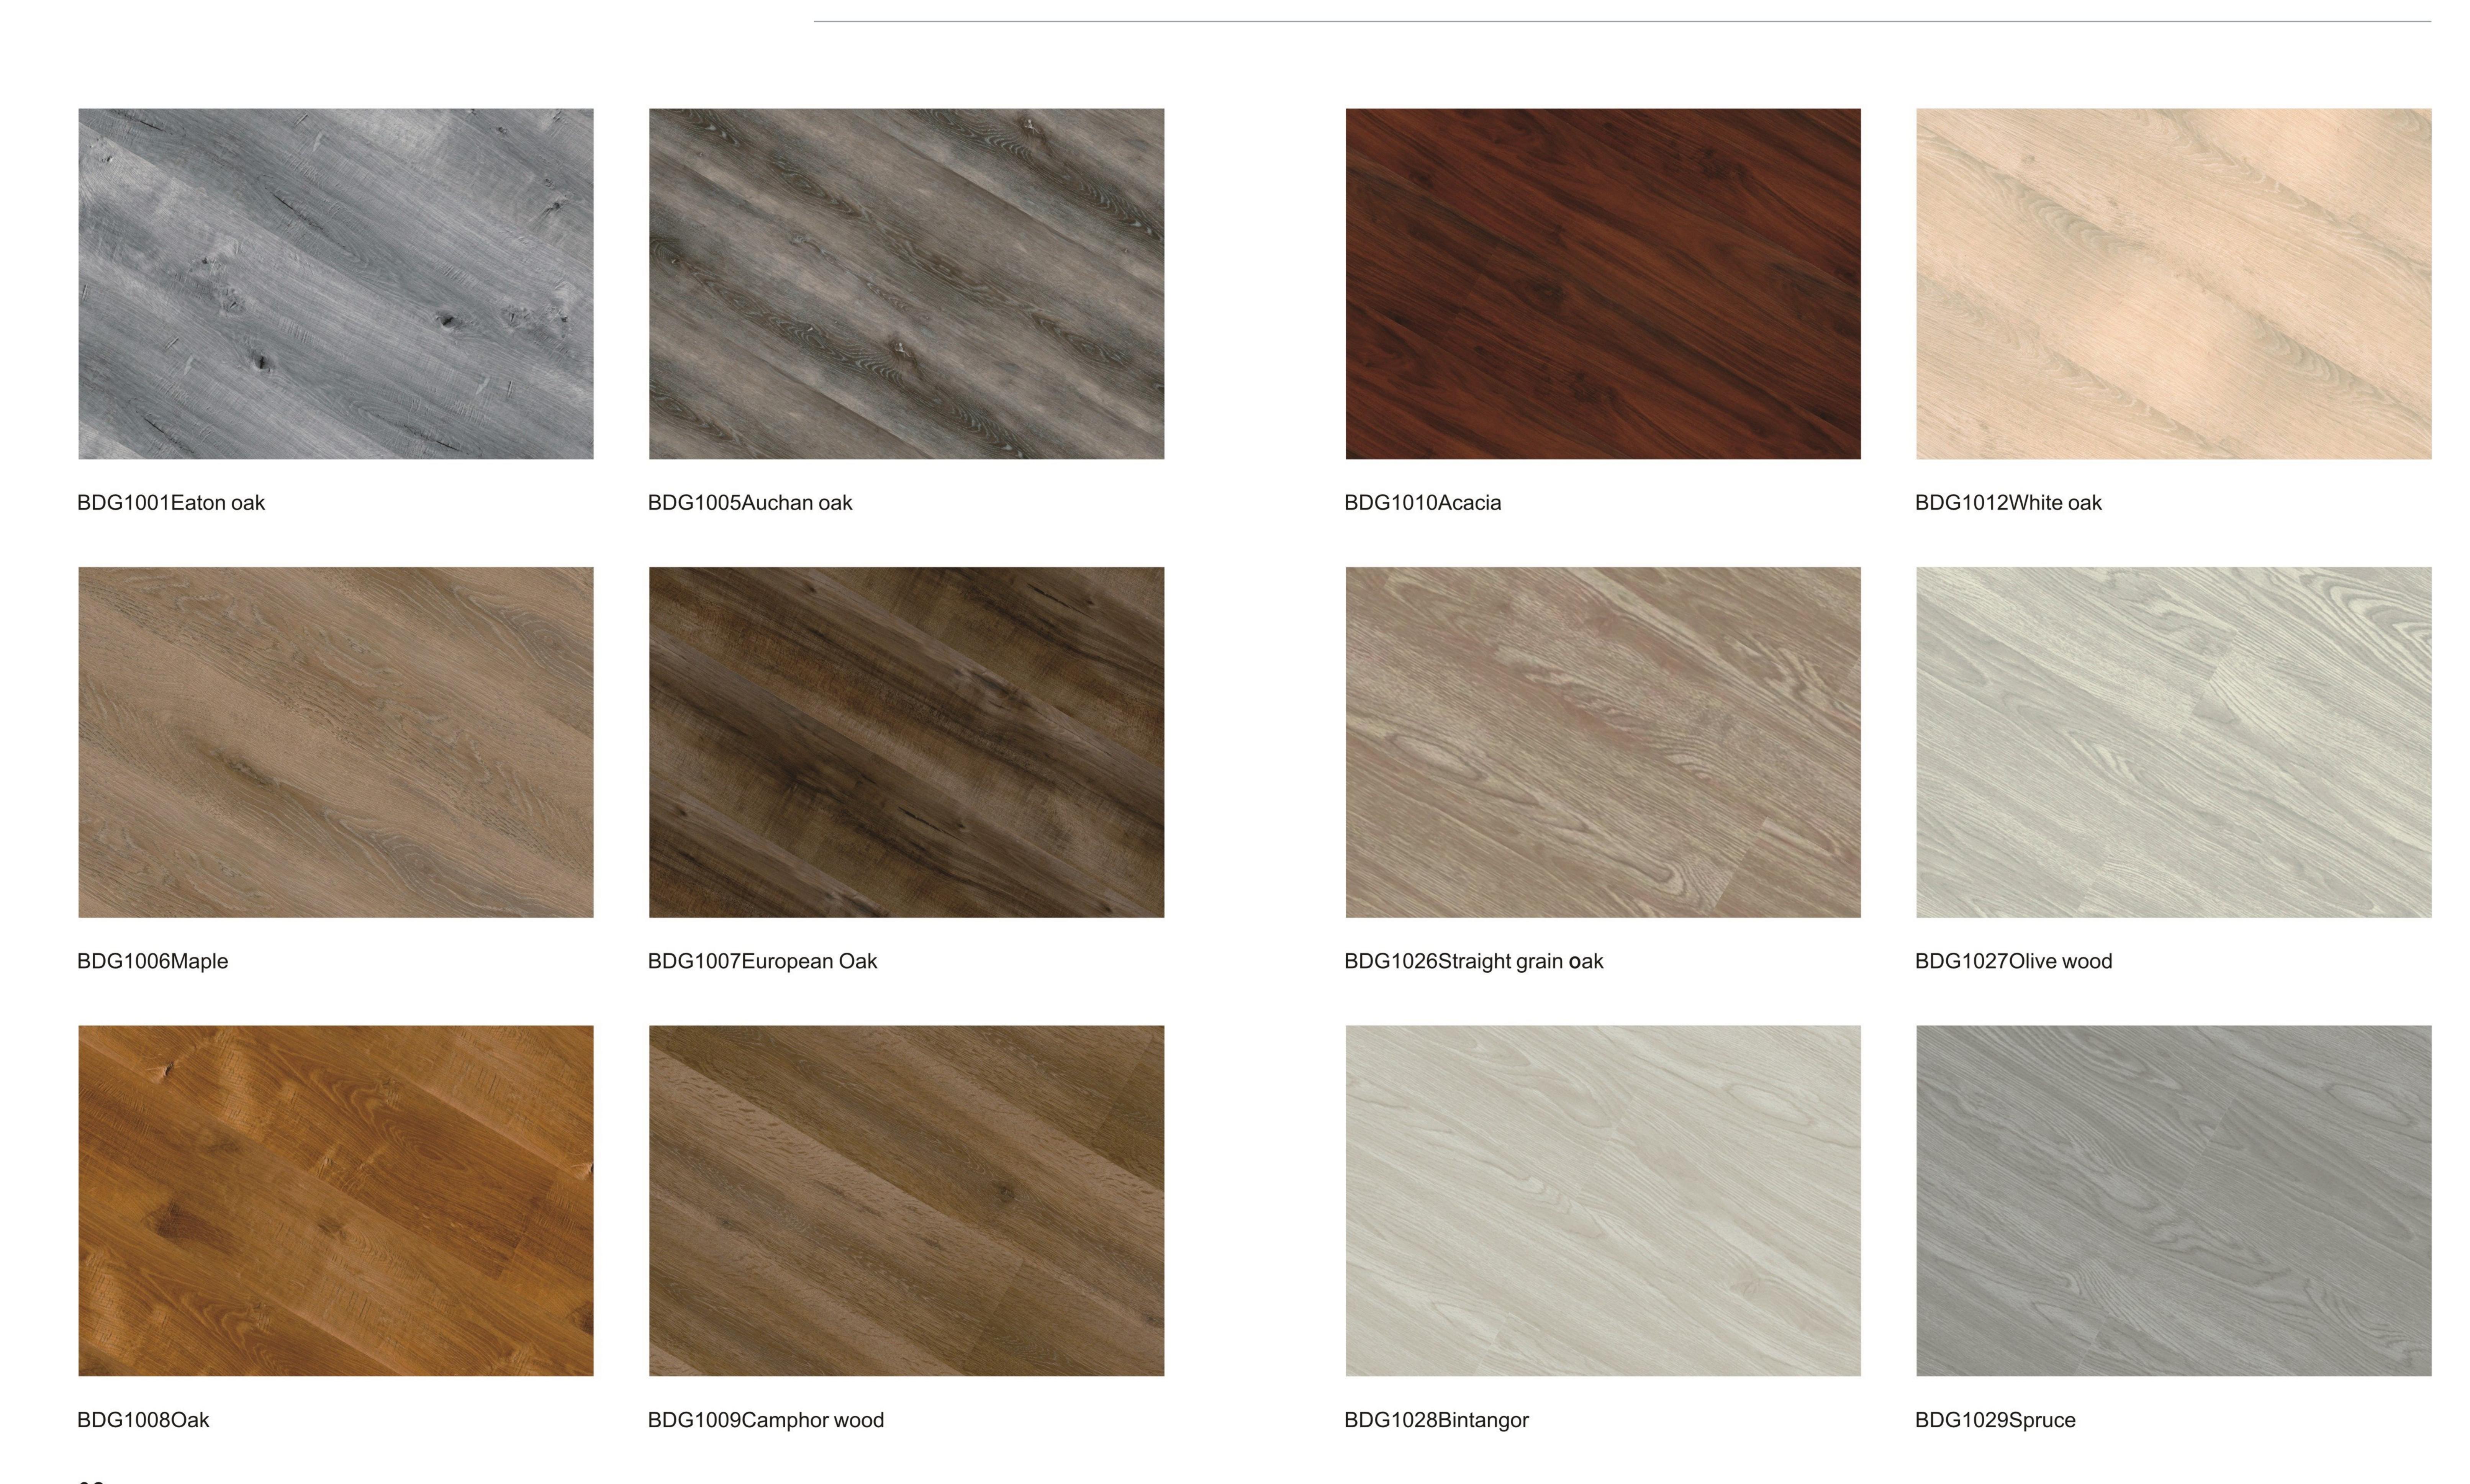


 $\mathbf{0}$




BDG1031Cherry wood

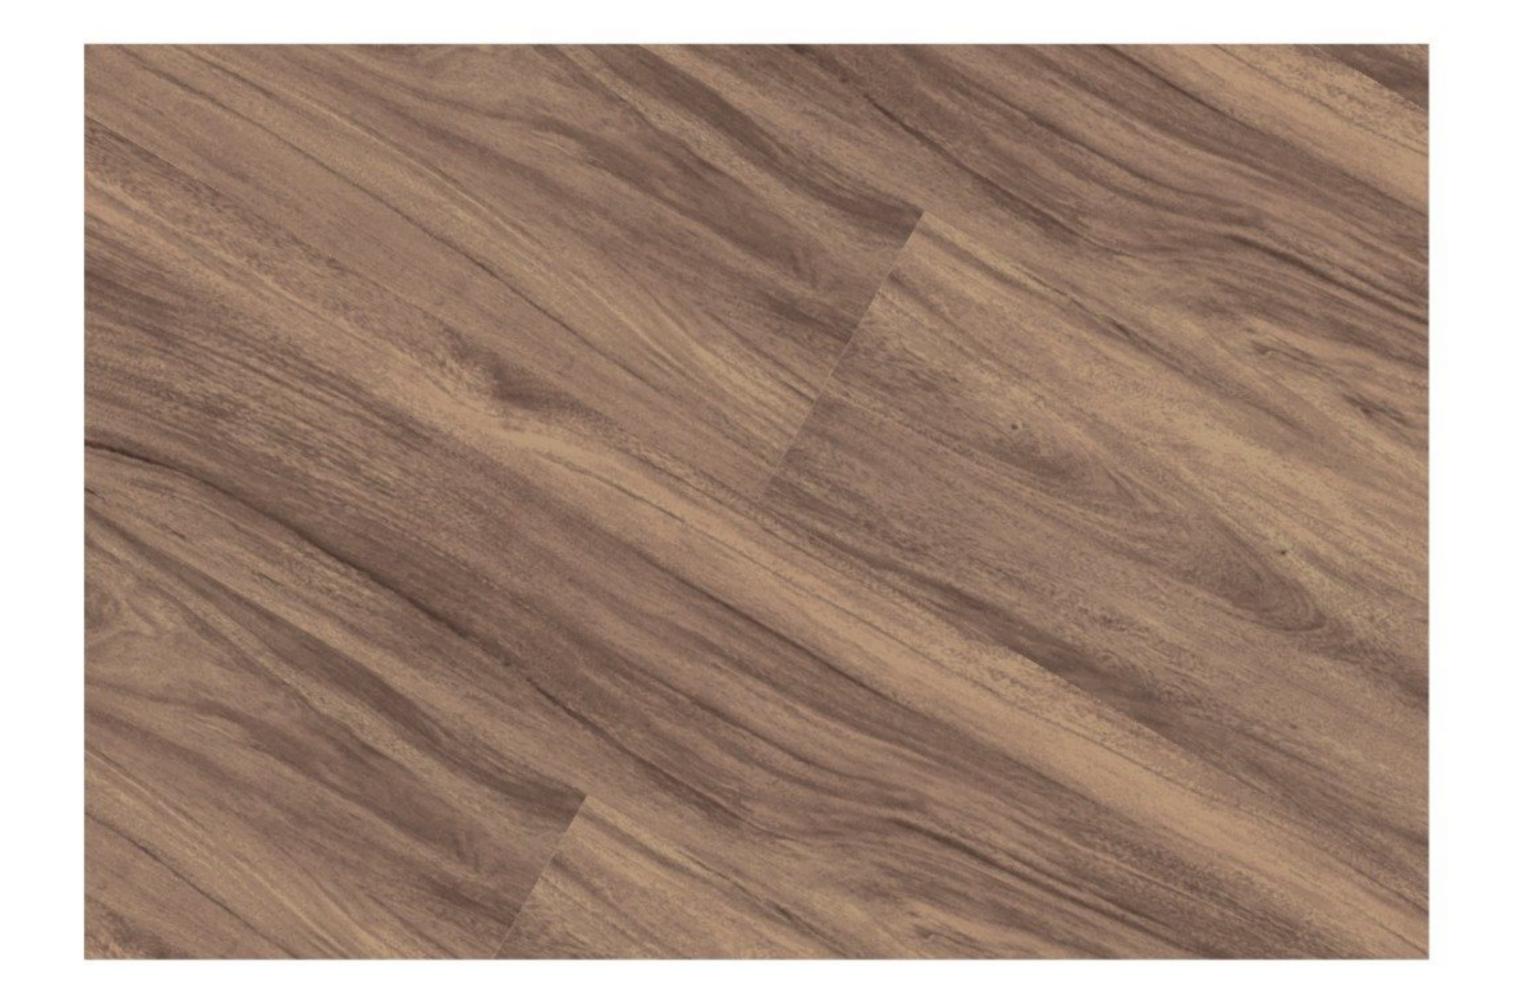


BDG1034Cassia siamea

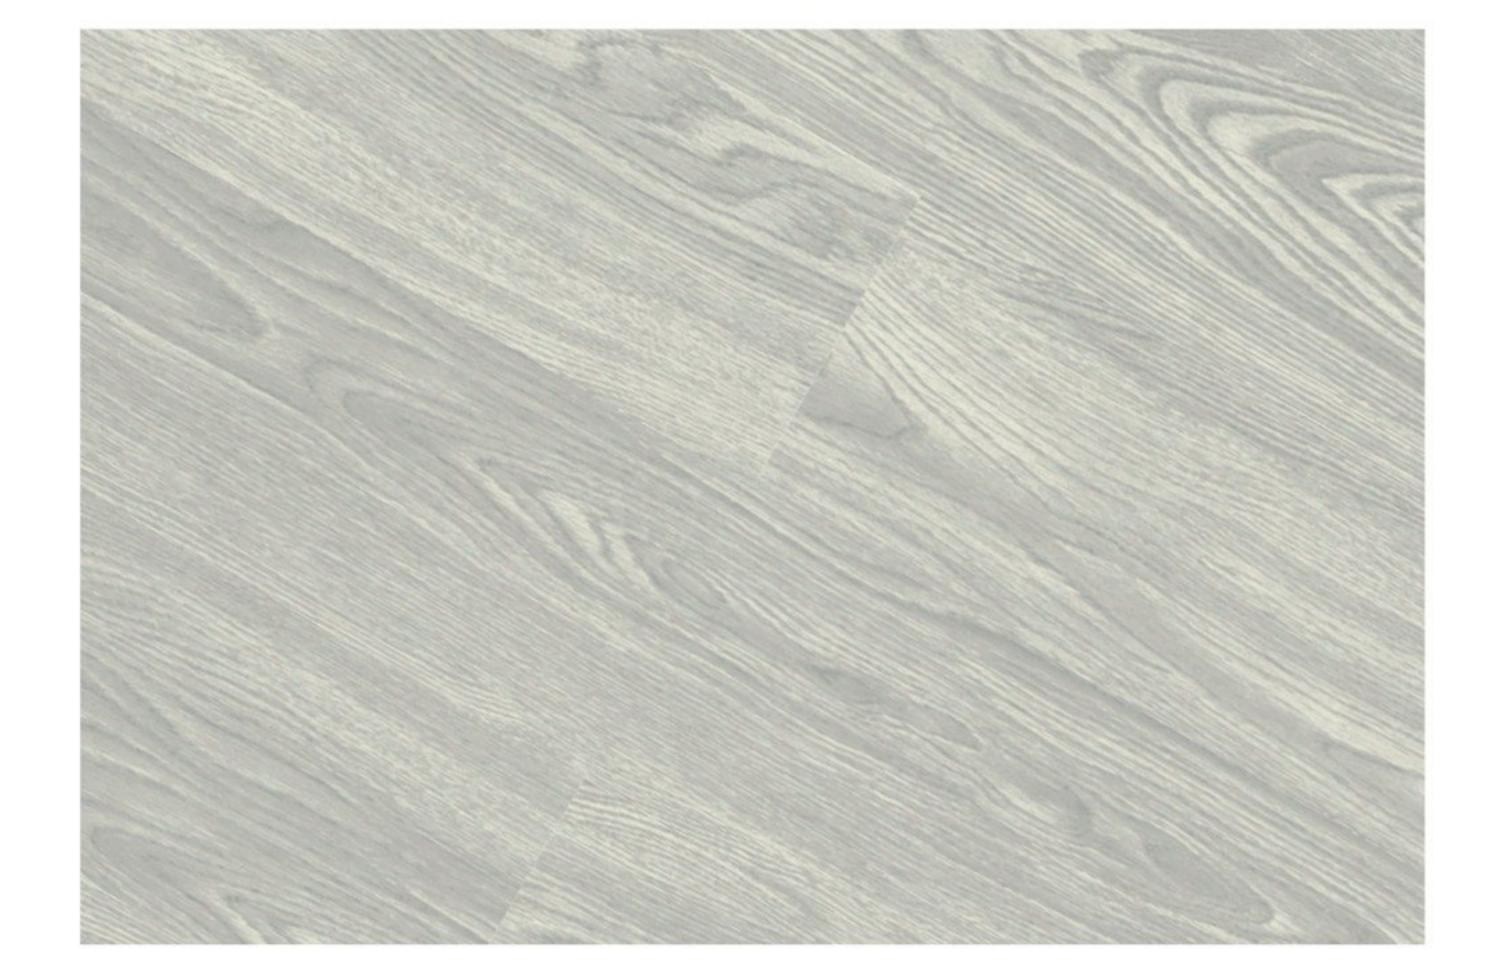


BDG1036Natural walnut

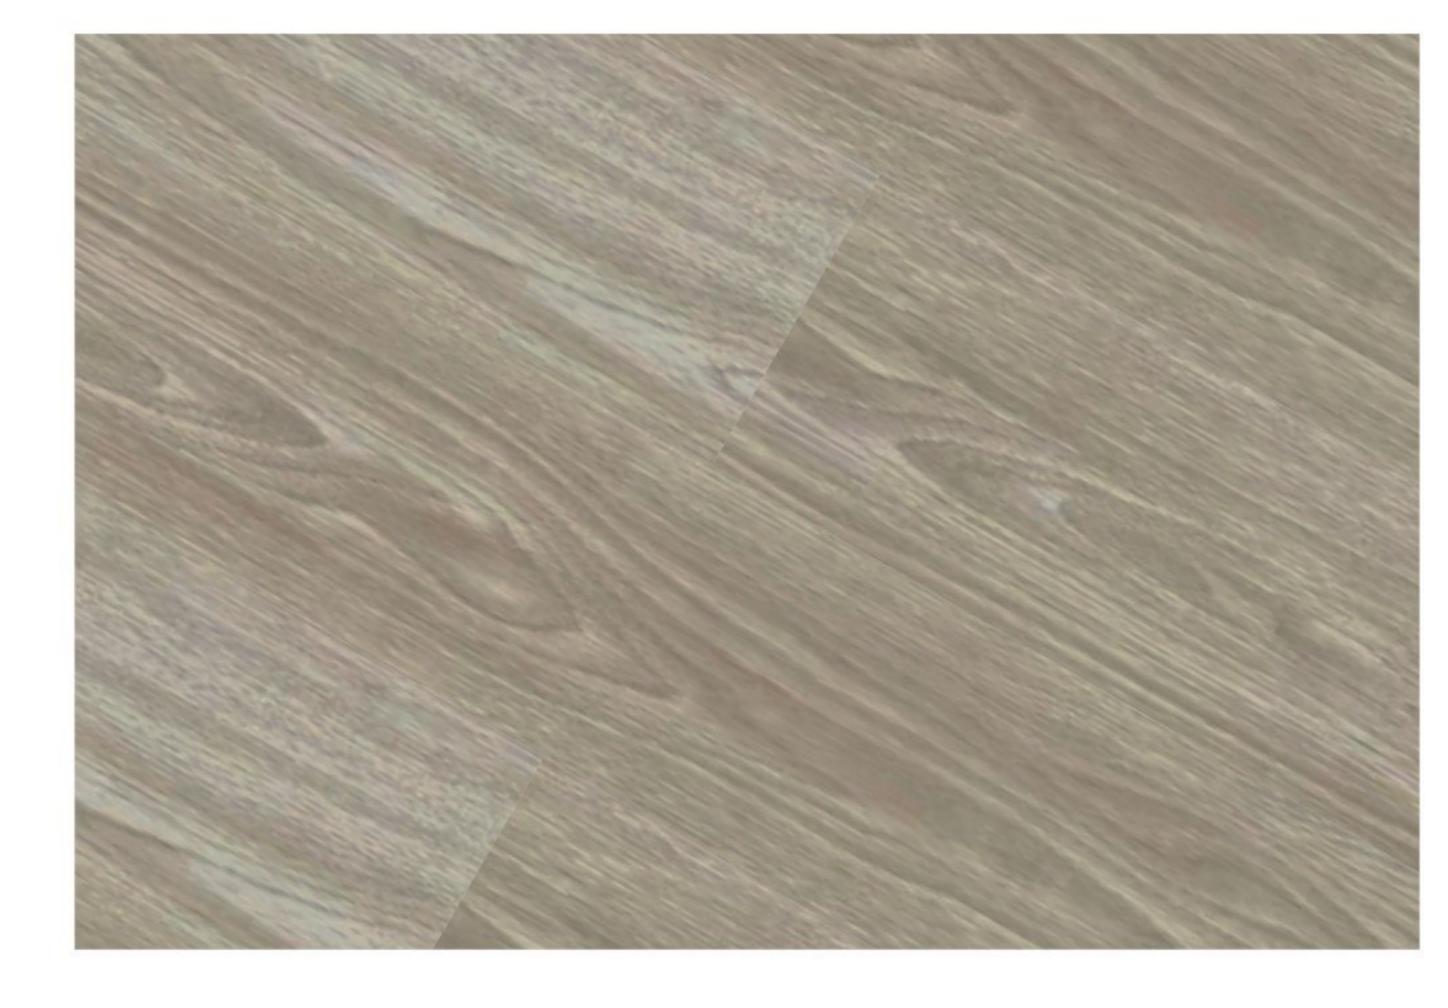

BDG1032Sycamore

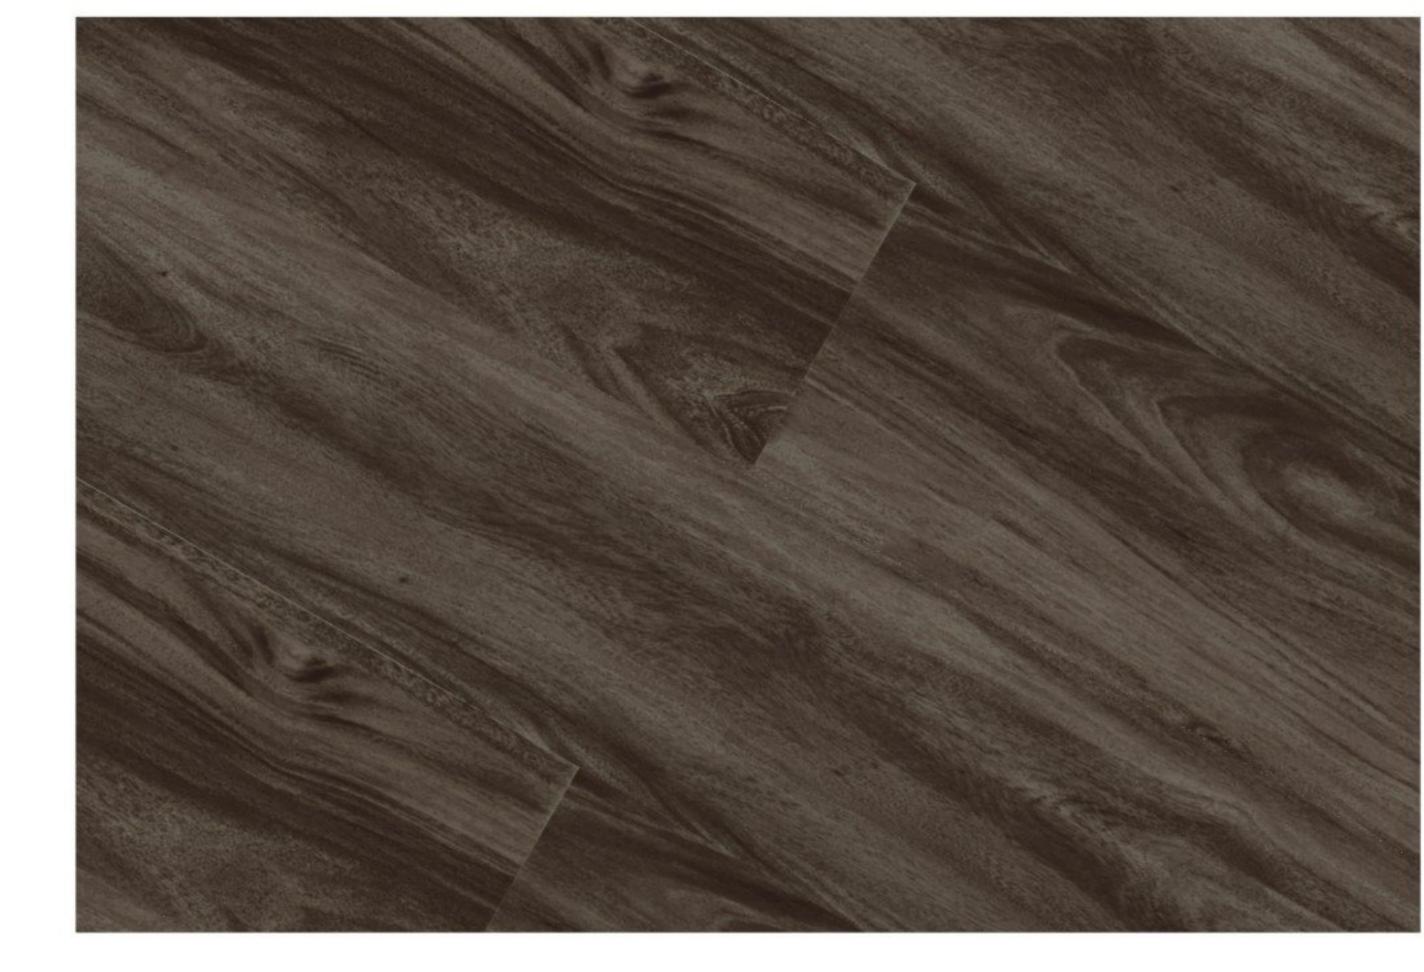


BDG1035Populus tremuloides

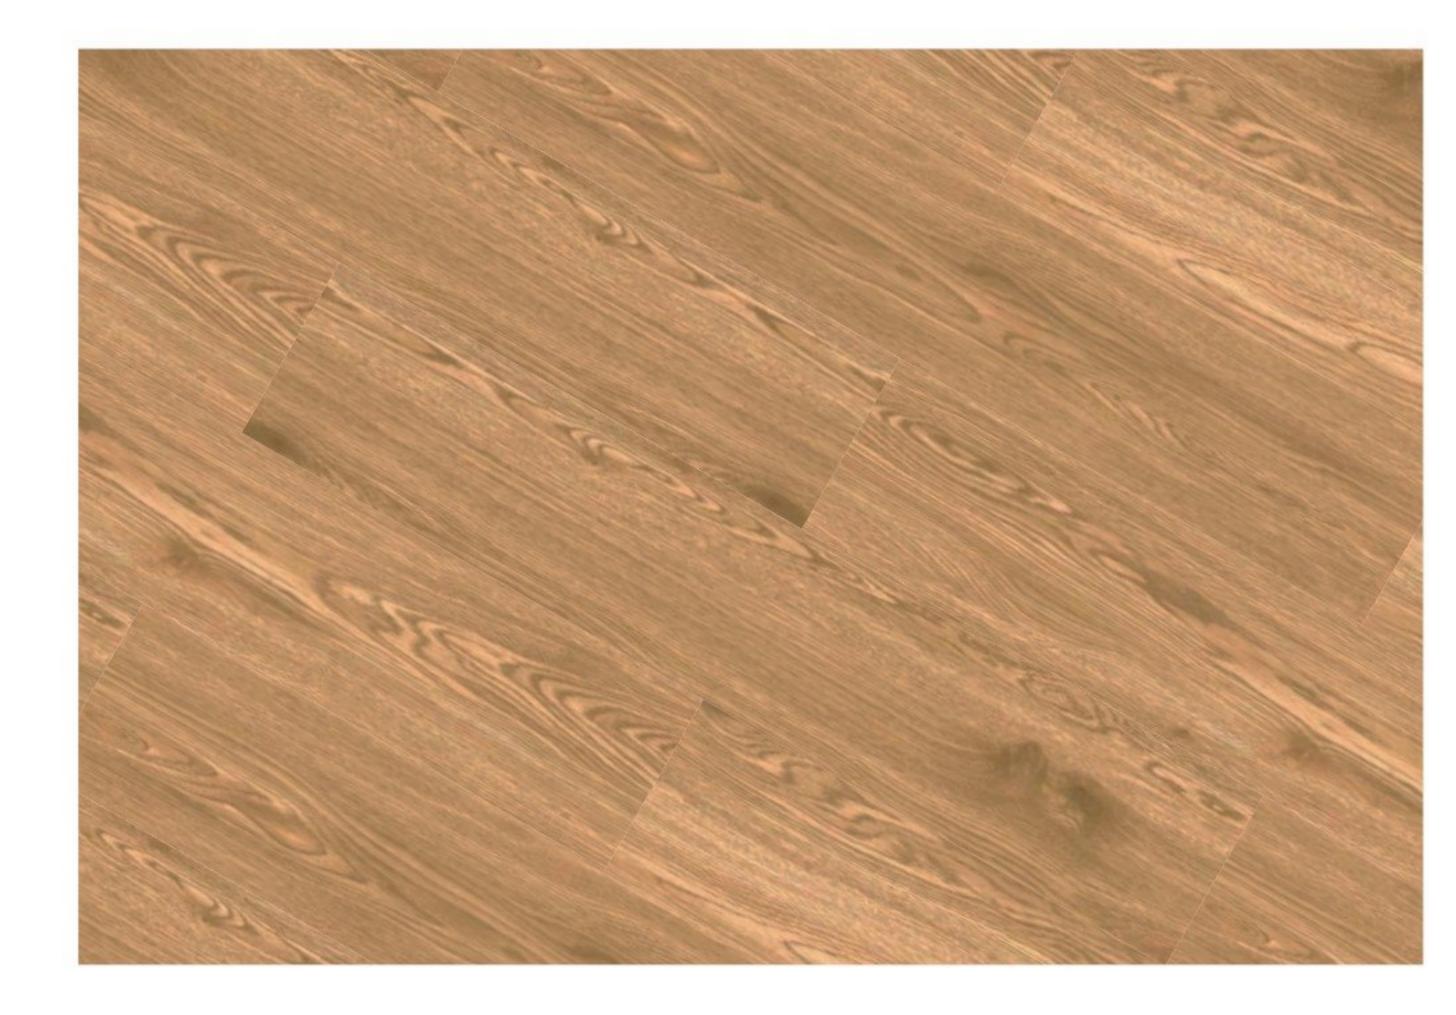

BDG1037Larch wood



BDG1001 Eaton oak

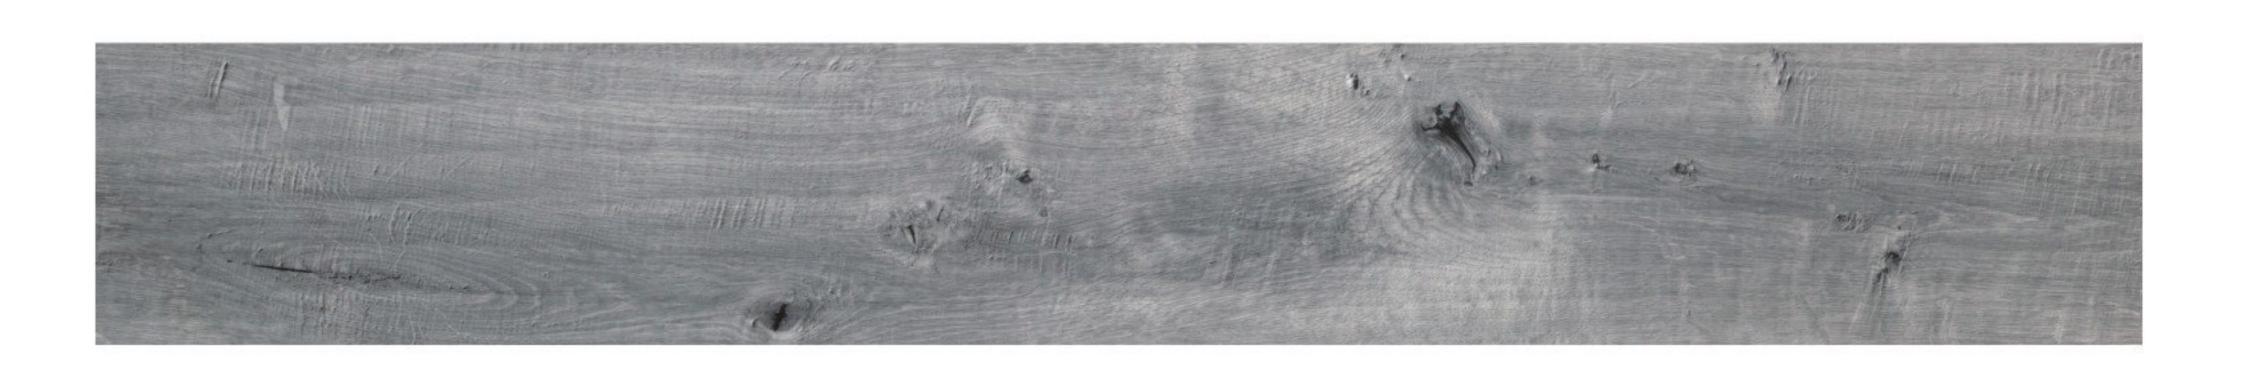

Specifications:1220 × 180mm × 4mm

BDG1016 Yellow oak



Specifications:1220×180mm×4mm





BDG1019 Grain wood



Specifications:1220×180mm×4mm

BDG1022 White pine



Specifications:1220×180mm×4mm





BDG1023 Yellow pine



Specifications:1220×180mm×4mm

BDG1025



Specifications:1220×180mm×4mm





BDG1026 Straight grain oak



Specifications:1220×180mm×4mm